



Research Article

EVALUATION OF WATER QUALITY INDEX OF WATER BODIES CHANNARAYAPATNA TALUK, KARNATAKA REGION, INDIA

H. R. Bharathi¹, S. Manjappa^{2*}, T. Suresh³ and B. Suresh⁴

¹Department of Environmental Science Kuvempu University, Shankaraghatta, Shimoga, Karnataka, India.

²Dept. of Chemistry, University BDT College of Engineering, Davangere – 577005, Karnataka, India.

³Department of Chemistry, Vijayanagara Sri Krishnadevaraya University, Bellary-583104, Karnataka, India

⁴Department of Civil Engineering, Bapuji Institute of Engineering & Technology, Davangere – 577 004, Karnataka, India.

*Corresponding author's email: drsmubdtce@rediffmail.com

Abstract

Present communication deals with a study of Physico-chemical parameters such as pH, Temperature, Total Suspended Solids, Turbidity, Dissolved Oxygen, Biochemical Oxygen Demand, Nitrate and Phosphate in water samples of Channarayapatna, Janivara, Anekere and Baghur water bodies in Channarayapatna taluka, Karnataka state of India. The water quality of the samples was compared with standard values given by World Health Organization (WHO) and United State Salinity Laboratory for drinking and irrigation purposes. Water Quality Index (WQI) was also calculated to know the overall quality of water samples. Water quality index (WQI) of Surface water body of various Sampling locations of Channarayapatna taluka, Karnataka ranged between 61.82 and 68.27 indicates the fair quality of water. The water quality index is calculated by indicator (100-point scale) shows that water is suitable for drinking purposes only after pretreatment like filtering, boiling, reverse osmosis and electro dialysis. WQI can play a big role in justifying the water pollution problems after encountered in different surface water bodies. Application of Water Quality Index (WQI) in this study has been found useful in assessing the overall quality of water and to get ride of judgment on quality of the surface water.

Keywords: Water Quality Index; surface water bodies; Channarayapatna; Region

Introduction

The term “water quality” includes the water column and the physical channel required to sustain aquatic life. The goal of the federal Clean Water Act, “To protect and maintain the chemical, physical and biological integrity of the nation's waters,” establishes the importance of assessing both water quality and the habitat required for maintaining other aquatic organisms. Water, the precious gift of nature to human being, is going to be polluted day-by-day with increasing urbanization.

It is well known fact that potable safe water is absolutely essential for healthy living. Adequate supply of fresh and safe drinking water is a basic need for all human beings on the earth. The problem of drinking water contamination, water conservation and water quality management has assumed a very complex shape. Attention on water contamination and its management has become a need of our because of far reaching impact on human health. The major hazard in drinking water supplies is microbial

contamination, which is due to agricultural land wash, domestic sewage, industrial effluents, improper storage and handling (WHO, 2006; Saha *et al.*, 2006).

The use of water quality indices (WQI) is a simple practice that overcomes many of the previous mentioned problems and allows the public and decision makers to receive water quality information (AOAC) (1995). The major tool of pollution profile studies is the water quality index (WQI). Horton proposed the first formal WQI in the literature in 1965 (Ott, 1978). Water Quality Index (WQI) is regarded as one of the most effective way to communicate water quality (Kannan, 1991; Pradhan, *et al.*, 2001). In a number of nationwide studies, water quality of different natural resources was assessed on the basis of calculated water quality indices (Sinha, *et al.*, 2001; Rajmohan, 2003). The data obtained through quantitative analysis and WHO water quality standards⁸ were used for calculating water quality indices. The purpose of calculating WQI and comparing it with the standards is to assess drinking water contamination

at selected water body at Channarayapatna taluka and seasonal variation of water quality after the onset of monsoon on the basis of calculated values of water quality indices.

A water quality index is a means to summarize large amounts of water quality data into simple terms for reporting to management and the public in a consistent manner. Similar to the UV index or an air quality index, it can tell us whether the overall quality of water bodies possess a potential threat to various uses of water, such as habitat for aquatic life, irrigation water for agriculture and livestock, recreation and aesthetics, and drinking water supplies. Water quality index (WQI) is a single value indicator to the water quality. It integrates the data pool generated after collecting due weights to the different parameters.

Material and Methods

Study Area

The study was carried out at selected water body in Channarayapatna taluk, which are a balancing and maintained to serve water requirement for irrigation and other human activity. The water samples from the identified

water bodies were collected at an interval of 30 days and analyzed for 14 physico-chemical parameters as per the standard method (APHA, 1989). The study area is shown on a satellite image with 4 sampling stations. The present study was conducted along the priority road which is of 18 Kms in length, touching 4 villages (water body) namely – Channarayapatna, Janivara, Bagura and Anekere. The Latitude and longitude ranges given in Table 1. Water quality index is calculated to determine the suitability of water for drinking purposes (Srivastava and Sinha, 1994; Das et al., 2001; Joshi, et al., 2004; Bhoi, et al., 2005). Water sampling index in is given in Fig. 1.

Table 1: Surface Water Sampling Locations in Channarayapatna taluk, Karnataka

S. N.	Code & Name of the site	Longitude	Latitude
1	SC ₁ Channarayapatna	76°24'30.5 8"E	12°54'56.9 7"N
2	SB ₁ Bagur	76°23'35.1 2"E	13°01'23.2 5"N
3	SJ ₁ Janivara	76°25'37.6 6"E	12°53'33.7 6"N
4	SA ₁ Anekere	76°20'52.1 2"E	12°54'30.4 7"N

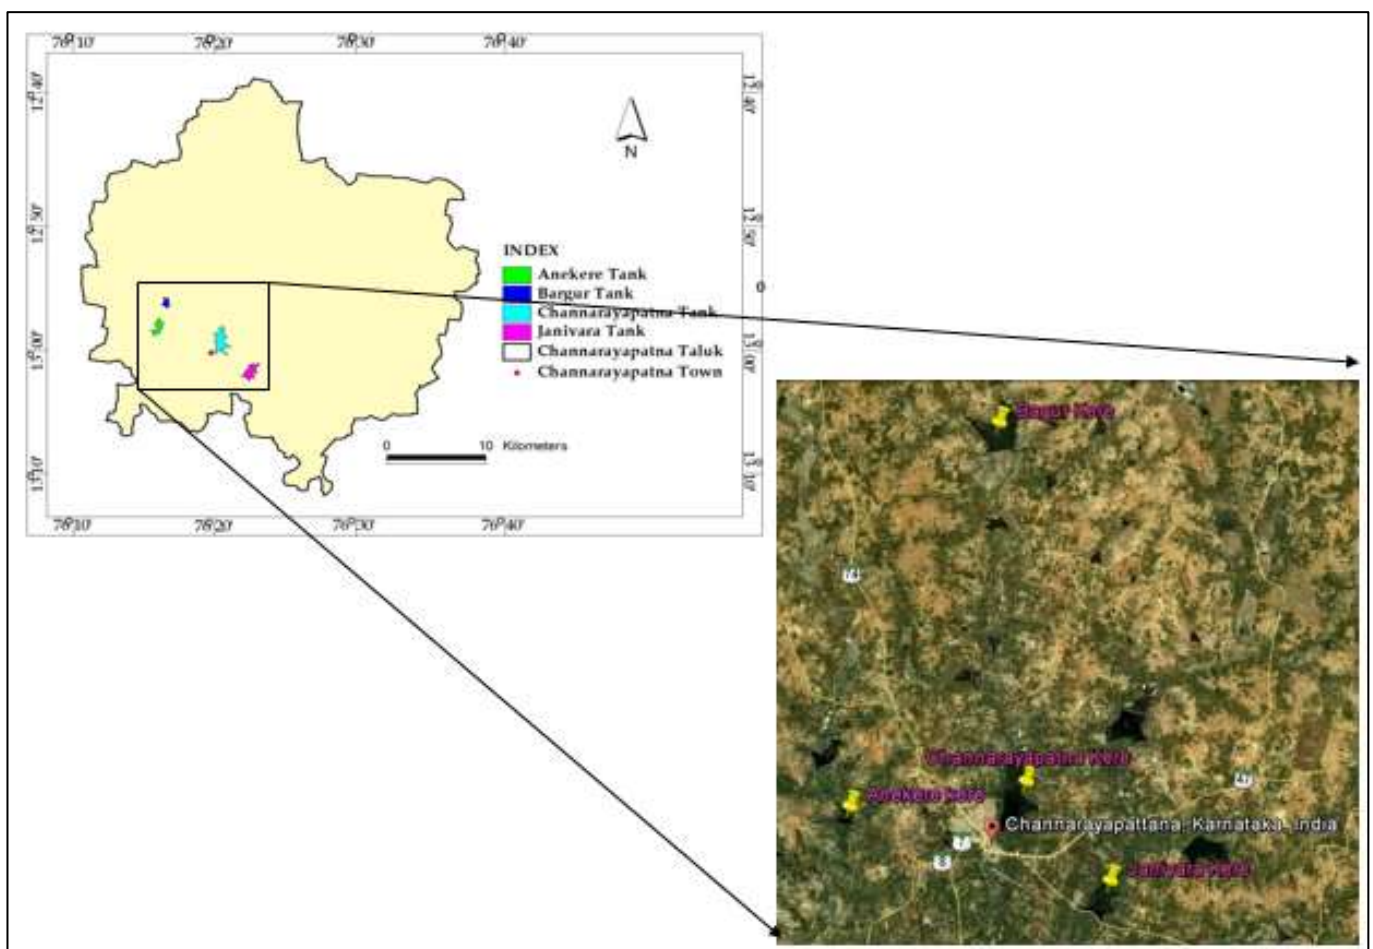


Fig. 1: Index of sampling location in Channarayapatna Taluk

Laboratory Analysis

In order to determine the water quality index, surface water samples were collected at selected water body from two sampling sites at each water body during June 2010 to January 2011. The samples were collected in sterilized bottles using the standard procedure for grab samples in accordance with standard methods of (Ramakrishniah, C.R., *et al.*, 2009). The samples were analyzed as per standard methods for thirteen Physico-Chemical parameters namely; pH (Hydrogen ion concentration), Turbidity, EC (Electrical conductivity), TDS (Total Dissolved Solids), TS (Total Solids), DO (Dissolved oxygen), BOD (Biochemical Oxygen Demand) and COD (Chemical Oxygen Demand), TH (Total hardness), Total Alkalinity (TA) ions of Ca^{2+} (Calcium), NO_3^- (Nitrate) and Cl^- (chloride), and Phosphate (PO_4). In situ measurement was adopted to determine unstable parameters including; pH, EC and DO by portable meters. The analysis of the parameters total hardness and ions of each calcium, magnesium, chloride and Free CO_2 were carried out by volumetric analysis in accordance with standard methods of (Ramakrishniah, C.R., *et al.*, 2009).

Calculation of WQI

The Water Quality Index (WQI) was calculated using the Weighted Arithmetic Index method. The quality rating scale for each parameter q_i was calculated by using this expression (Sinha, D. K., *et al.*, 2004).

$$\text{Quality rating, } Q_i = 100 [(V_n - V_i) / (V_s - V_i)]$$

Where, V_n : actual amount of n th parameter

V_i : the ideal value of this parameter

$V_i = 0$, except for pH and DO. $V_i = 7.0$ for pH; $V_i = 14.6 \text{ mg/L}$ for DO.

V_s : recommended WHO standard of corresponding parameter

Relative weight (W_i) was calculated by a value inversely proportional to the recommended standard (S_i) of the corresponding parameter.

$W_i = 1 / S_i$, WQI are discussed for a specific and intended use of water. In this study the WQI for human consumption is considered and permissible WQI for the drinking water is taken as 100. The overall WQI was calculated by using Equation:

$$\text{Water Quality Index (WQI)} = \frac{\sum(Q_i)W_i}{\sum W_i} \text{ (WQI)}$$

Results and Discussion

Physico-chemical characteristics of Surface water quality at four region of Channarayapatna, Janivara, Bagur and Anekere water body at Channarayapatna Taluk of Karnataka state are given from Tables 2 to 5 respectively. It should be recognized that, like dissolved oxygen, pH varies naturally due to the photosynthesis and respiration cycles in

the presence of algae in Channarayapatna water body. The pH is measure of the intensity of acidity or alkalinity and the concentration of hydrogen ion concentration. pH has no direct adverse effects on health; however, higher values of pH hasten the scale formation in water heating apparatus and also reduce germicidal potential of chloride. The pH values of water samples of present study ranged from 7.17 (south region) to 7.40 (north region) for Channarayapatna, 7.03 (east region) to 7.55 (south region) for Bagur, 7.40 (north region) to 7.60 (north region) for Janivara and 7.14 (west region) to 7.56 (north region) for Anekere water bodies respectively. These values are within the prescribed limit of standards (WHO 2001; 2002). The analyses of the parameters, their range, mean and SD compared with WHO standards are given in respective Tables. Turbidity in selected surface water body samples of Channarayapatna, Bagur, Janivara and Anekere ranged from 2.18 NTU at west region of the Channarayapatna water body to 5.01 NTU in north region of Bagur water body respectively. Electrical conductivity (EC) content in water samples of selected water body (Channarayapatna, Bagur, Janivara and Anekere) ranged from 342.0 mS/cm to 724.0 mS/cm at East and south regions of Bagur and Channarayapatna water body. The results show that EC values high in Channarayapatna and low in Bagur. Prescribed standard values by WHO for EC is 1400 mS/cm. The value of EC is very low (342.0 mS/cm) in the water of Bagur water body.

Total suspended solids (TSS) are found in natural surface water. TSS values of water samples ranged from 1.0 to 4.2 mg/L. The SD values of TSS for water samples of selected water body of Channarayapatna Taluka Karnataka region, Channarayapatna, Bagur, Janivara and Anekere are ± 0.93 , ± 1.18 , ± 0.68 and ± 0.25 respectively. Maximum TDS of well water found in Abbottabad district having value of the 556 mg/L in Channarayapatna water body, while the minimum TDS value was found to be 239 mg/L in Janivara water body (Table 2). The result showed that the drinking water of selected water bodies from Channarayapatna taluk is fit for drinking in terms of TDS.

The classification of groundwater, based on total hardness shows that no on water samples from selected water bodies in channarayapatna fall in the within the permissible limit of WHO, BIS and ICMR category. The maximum allowable limit of total hardness is 500 mg/l and the most desirable limit is 300 mg/l as per the WHO, BIS and ICMR standards (Table 2). For total hardness, the most desirable limit is 80 mg/L to 100 mg/L Hardness below 300 mg/l is considered potable but beyond this limits cause gastrointestinal irritation (ICMR 1975). Normal water hardness does not pose any direct health problems. Jain et.al 1998 reported that high concentration of hardness (150 to 300 mg/l and above) May cause kidney problems. From the study it reveals that all the selected water bodies were showing the hardness content is within the permissible limit

of drinking water standards. Calcium and Magnesium content in selected water bodies samples were found within the permissible limit given by WHO standards (75 mg/l) except Channarayapatna and Janivara which is very near to the source of Agricultural runoff. The value of SD of calcium and magnesium of water samples is for Channarayapatna, Bagur, Janivara and Anekere water bodies are computed as ± 12.10 , ± 13.79 , ± 5.10 , ± 5.14 and ± 6.75 , ± 8.27 , ± 2.45 and ± 2.31 respectively.

Table 2: Drinking water Standards of WHO (1963), BIS (1992) and ICMR (1975)

Parameters	WHO	BIS	ICMR
pH	6.5 – 8.5	7.0 – 8.0	7.0 – 8.5
Electrical Conductivity, $\mu\text{s}/\text{cm}$	3000	3000	3000
Total Hardness, ppm	500	500	300
Calcium hardness, ppm	75	75	75
Magnesium, ppm	50	50	50
Chloride, ppm	250	200	250 – 1000
Alkalinity, ppm	75	---	---
Dissolved Oxygen, ppm	4.0 – 6.0	4.0 – 6.0	4.0 – 6.0
Nitrate	20	45	--
BOD	5	--	--
DO	>5	--	--
Turbidity	10	5	--
Total Suspended Solids	0	--	--
TDS	2000	--	--

The alkalinity range set by WHO is 500 mg/L. The result on alkalinity of water samples from selected water bodies showing the alkalinity found 232.50, 248.25, 179.0 and 188.25 mg/L. Minimum alkalinity found in Janivara water body was 179.0 mg/L (Table 4). The maximum range of alkalinity is 232.5 mg/L (Table 3). Free Carbon Dioxide

content of water samples of channarayapatna taluk, Hassan district of Karnataka ranged from 2.3 mg/L at east region to 3.4 at south region in channarayapatna, 1.2 mg/L north region to 2.6 mg/L in Bagur, 0.9 mg/L to 2.6 mg/L in Janivara and 0.6 mg/L to 2.1 mg/L in Anekere water body respectively. The value of SD of free carbon dioxide of water samples is for Channarayapatna, Bagur, Janivara and Anekere computed as (± 0.46 , ± 0.59 , ± 0.74 and ± 0.62). Chloride: Chloride values ranged from 17.89 mg/L at south region of Janivara water body to 85.18 mg/L at south region of channarayapatna water body. High chloride content can cause high blood pressure in people. Chloride in excess (< 250 mg/l) imparts a salty taste to water and people who are not accustomed to high chloride may be subjected to laxative effect. High Chloride concentration is also an indicator of large amount of organic matter. Present study reveals that all the water bodies were showing the chloride content within the permissible limit of prescribed standards. Dissolved oxygen concentration of selected water bodies ranged from 5.20 mg/L to 6.36 mg/L in Channarayapatna water body, while in Bagur water body 5.40 mg/L to 7.40 mg/L. Janivara water body is ranged from 6.32 mg/L to 8.10 mg/L and in Anekere water body is 6.5 mg/L to 7.98 mg/L of Hassan District, Karnataka. All water samples of Karnataka Hassan region were found within the permissible limit given by WHO, BIS and ICMR. The SD values of DO in water samples is for Channarayapatna, Bagur, Janivara and Anekere computed as ± 0.59 , ± 0.89 , ± 0.73 and ± 1.59 respectively). The scope of parameters is limited to evaluation indicators or criteria that are representative of the type of pollution. BOD and COD both parameters are interdependent at the ration of 1:3. From the present also reveals the same trend. The average BOD content of water samples of Channarayapatna, Bagur, Janivara and Anekere water body are 6.0, 3.61, 3.02 and 3.67 mg/L. The average COD content of water samples of Channarayapatna, Bagur, Janivara and Anekere water body are 14.93, 10.50, 9.0 and 9.55 mg/L respectively. Except channarayapatna water body, all other three water bodies of Hassan District Karnataka State was found within the permissible limit given by WHO; BOD 5 mg/l (5 days at 20°C).

Table 3: Physico-chemical characteristics of surface water of Channarayapatna Water body

Parameters	North region	South region	East region	West region	Mean	SD	Comparison with WHO standard
pH	7.40	7.17	7.30	7.27	7.29	0.09	within
Turbidity	2.40	3.08	2.20	2.18	2.47	0.42	within
Conductivity, $\mu\text{s}/\text{cm}$	612.0	724.0	422.0	642.0	600.00	127.76	within
Total Alkalinity, ppm	175.0	240.0	275.0	240.0	232.50	41.73	exceed
Total Suspended Solids, ppm	4.2	3.6	2.7	2.1	3.15	0.93	exceed

Table 3: Physico-chemical characteristics of surface water of Channarayapatna Water body

Parameters	North region	South region	East region	West region	Mean	SD	Comparison with WHO standard
TDS, ppm	581.0	671.0	481.0	491.0	556.00	88.88	exceed
DO, ppm	6.22	6.36	5.20	5.36	5.79	0.59	Medium
BOD, ppm	5.42	5.97	6.20	6.42	6.00	0.43	Within
COD, ppm	16.86	15.00	12.86	15.00	14.93	1.63	---
Total hardness, ppm	170.0	150.0	160.0	130.0	152.50	17.08	Within
Calcium, ppm	60.92	64.13	56.92	84.13	66.53	12.10	medium
Magnesium, ppm	36.81	34.34	34.71	30.24	32.03	6.75	Within
Free CO ₂ , %	2.8	3.4	2.3	2.6	2.78	0.46	--
Chloride, ppm	71.57	85.18	51.97	69.18	69.48	13.63	within

Table 4: Physico-chemical characteristics of surface water of Bagur Water body

Parameters	North region	South region	East region	West region	Mean	SD	Comparison with WHO standard
pH	7.07	7.55	7.03	7.28	7.23	0.24	within
Turbidity	5.10	2.80	3.40	3.18	3.62	1.02	within
Conductivity, μ s/cm	560.0	536.0	342.0	442.0	470.00	99.37	within
Total Alkalinity, ppm	240.0	190.0	265.0	298.0	248.25	45.52	exceed
Total Suspended Solids, ppm	2.9	2.2	1.0	3.8	2.48	1.18	exceed
TDS, ppm	320.0	304.0	260.0	160.0	261.00	71.95	within
DO, ppm	6.00	7.40	5.40	5.66	6.12	0.89	Medium
BOD, ppm	3.52	4.51	3.80	2.62	3.61	0.78	Within
COD, ppm	7.26	14.60	11.00	9.12	10.50	3.13	---
Total hardness, ppm	280.0	250.0	260.0	230.0	255.00	20.82	Within
Calcium, ppm	85.09	64.47	52.13	62.62	66.08	13.79	Within
Magnesium, ppm	33.12	25.19	44.71	30.24	33.32	8.27	Within
Free CO ₂ , %	1.8	1.2	2.1	2.6	1.93	0.59	--
Chloride, ppm	59.7	21.87	34.50	40.32	39.10	15.75	within

Table 5: Physico-chemical characteristics of surface water of Janivara Water body

Parameters	North region	South region	East region	West region	Mean	SD	Comparison with WHO standard
pH	7.60	7.59	7.40	7.59	7.55	0.10	within
Turbidity	2.90	3.10	2.70	2.80	2.88	0.17	within
Conductivity, μ s/cm	589.0	489.0	643.0	369.0	522.50	120.59	within
Total Alkalinity, ppm	170.0	185.0	192.0	169.0	179.00	11.34	exceed
Total Suspended Solids, ppm	2.4	3.2	2.8	1.6	2.50	0.68	exceed

Table 5: Physico-chemical characteristics of surface water of Janivara Water body

Parameters	North region	South region	East region	West region	Mean	SD	Comparison with WHO standard
TDS, ppm	290.0	260.0	210.0	196.0	239.00	43.71	within
DO, ppm	7.20	7.32	8.10	6.32	7.24	0.73	Medium
BOD, ppm	3.50	2.67	2.80	3.12	3.02	0.37	Within
COD, ppm	10.00	6.00	12.00	8.00	9.00	2.58	---
Total hardness, ppm	176.0	152.0	166.0	148.0	160.50	12.90	Within
Calcium, ppm	44.09	38.48	42.09	32.48	39.29	5.10	Within
Magnesium, ppm	16.08	13.65	18.08	12.65	15.12	2.45	Within
Free CO ₂ , %	2.6	0.9	1.5	1.2	1.55	0.74	--
Chloride, ppm	29.82	17.89	19.82	16.92	21.11	5.93	within

Table 6: Physico-chemical characteristics of surface water of Anekere Water body

Parameters	North region	South region	East region	West region	Mean	SD	Comparison with WHO standard
pH	7.56	7.14	7.46	7.14	7.33	0.22	within
Turbidity	3.26	4.92	3.78	4.92	4.22	0.84	within
Conductivity, μ s/cm	662.0	540.0	560.0	540.0	575.50	58.43	within
Total Alkalinity, ppm	185.0	205.0	165.0	198.0	188.25	17.58	exceed
Total Suspended Solids, ppm	1.9	1.8	2.2	1.6	1.88	0.25	exceed
TDS, ppm	200.0	360.0	220.0	260.0	260.00	71.18	within
DO, ppm	7.50	6.98	6.50	7.98	6.49	1.59	Medium
BOD, ppm	4.81	2.02	4.81	3.02	3.67	1.38	Within
COD, ppm	14.00	5.60	12.00	6.60	9.55	4.09	---
Total hardness, ppm	250.0	278.0	210.0	228.0	241.50	29.32	Within
Calcium, ppm	44.13	37.41	42.13	32.62	39.07	5.14	Within
Magnesium, ppm	23.88	28.76	26.78	28.76	27.05	2.31	Within
Free CO ₂ , %	1.5	1.3	2.1	0.6	1.38	0.62	--
Chloride, ppm	49.70	77.53	44.50	70.32	60.51	15.91	within

Table 7: Parameter-wise WHO standards and their WQI values of the four water bodies

S. N.	Parameters	Units	Units weight	Selected Water Body			
				Channarayapatna	Bagur	Janivara	Anekere
1	pH	-	0.219	91	90	86	96
2	Turbidity	NTU		81	82	70	76
3	Conductivity, μ s/cm	μ s/cm	0.371	36	68	56	58
4	Total Suspended Solids, ppm	ppm	0.0037	92	81	78	92
5	TDS, ppm	ppm	0.0037	82	76	82	66
6	DO, ppm	ppm	0.3723	6	5	6	8
7	BOD, ppm	ppm	0.3723	66	72	64	76
8	Total hardness, ppm	ppm	0.0062	46	64	66	60
9	Calcium, ppm	ppm	0.025	66	72	70	58
10	Magnesium, ppm	ppm	0.061	58	65	56	62
11	Chloride	ppm	0.0074	56	76	50	86
	Average Water Quality Index			61.82	68.27	62.18	67.09

Table 8: Water Quality Index (WQI) of Surface Water at Various Sampling Locations

Karnataka region	WQI	WQI Range	Water Quality Indicators (Status)	
			(CCME, 2005)	
SC ₁ Channarayapatna	61.82	61.82– 68.27 (Fair to marginal water quality)	95-100	Excellent: Water quality is protected with virtual absence of threat or impairment; conditions very close to natural or desirable levels
SB ₁ Bagur	68.27		80-94	Good: Water quality is protected with only minor degree of threat or impairment; conditions depart from natural or desirable levels
SJ ₁ Janivara	62.18		60-79	Fair: Water quality is usually protected but occasionally threatened or impaired; conditions sometimes depart from natural or desirable levels
SA ₁ Anekere	67.09		45-59	Poor (Marginal): Water quality is frequently threatened or impaired; conditions often depart from natural or desirable levels
			0-44	Very Poor: Water quality is almost always threatened or impaired; conditions usually depart from natural or desirable levels (unsuitable for drinking)

Evaluation of results and grading: For each indicator, the grading scale followed the “ranking” scale recommended by the CCME (2001). That also used five categories or levels that correspond to specific levels of water quality impairment. Water quality index (WQI) of Surface water of various sampling locations of Hassan District Karnataka State ranged from 61.82 to 68.27 indicates the fair quality of water. WQI was calculated to find the suitability of water for drinking only after pretreatment like filtering, boiling, reverse osmosis and electro dialysis. An appropriate method for improving the surface water quality in the affected areas is considered for suitable treatment. WQI values ranges from 100 (excellent) to 0 (very poor). WQI scores were grouped into one of five categorized that serves to summarize the overall state of water quality. The categories and category description are in Table 8.

Conclusion

- Water quality index (WQI) of Surface water body of various Sampling locations of Channarayapatna taluka, Karnataka ranged between 61.82 and 68.27 indicates the fair quality of water. Water is suitable for drinking purposes only after pretreatment like filtering, boiling, reverse osmosis and electro dialysis.
- WQI can play a big role in justifying the water pollution problems after encountered in different surface water bodies. Application of Water Quality Index (WQI) in this study has been found useful in assessing the overall

quality of water and to get rid of judgment on quality of the surface water.

- The analysis reveals that surface water from channarayapatna taluka of Karnataka is poor for drinking purpose as per the water quality index. However, this water can be used for drinking purpose after purification treatment followed by disinfection before consumption and it also need to be protected from the perils and contaminations and quite good for irrigation purpose.

Reference

- Agbaire PO and Obi CG (2009) Seasonal Variations of Some Physico-Chemical Properties of River Ethiope Water in Abraka, Nigeria. *Journal of Applied Science and Environment Management* **13**(1): 55 – 57.
- American Public Health Association (APHA-AWWA-WPCF), (1989). Standard methods for the examination of water and wastewater, 1989.
- Association of Official Analytical Chemists (AOAC) (1995) AOAC Official Methods of Analysis, 16th ed. AOAC International, Gaithersburg, Maryland, (March 1998 revision).
- Bhoi DK Raj DS Mehta YM Chauhan MB and Machhar MT (2005) Physico-chemical analysis of bore wells drinking water of Nadiad territory. *Asian J. Chem.* **17**(1): 404- 408.
- Das Gupta M Purohit KM and Jayita Dutta (2001) Assessment of drinking water quality of river Brahmani. *Journal of Environmental and pollution* **8**: 285-291.

- Guidelines for Water Quality Monitoring, Central Pollution Control Board, INDIA, MINAS/27/2007-08.
- Indian Standard Specifications for Drinking Water, BIS: 10500, 1992.
- Joshi JD Vora JJ Sharma SS Patel N Kothari O and Salvi K (2004) *Int. J. Chem. Sci.* **2(3)**: 337-344.
- Kannan K (1991) Fundamentals of Environmental Pollution, S. Chand & Company Ltd., New Delhi.
- Ott WR (1978) Environmental Indices: Theory and Practice, Ann Arbor, MI (USA): Science Publishers Inc.
- Pradhan SK, Patnaik D and Rout SP (2001) Ground Water Quality Index for ground water around a phosphatic fertilizer plant. *Indian J. Env. Prot.* **21(4)**: 355-358.
- Rajmohan, N (2003) Major correlation in ground water of Kancheepuram region, South India, *Indian J. Environ. Hlth.* **45(1)**: 1-5.
- Ramakrishniah CR Sadashivaiah C and Ranganna G (2009) Assessment of Water Quality Index for the Groundwater in Tumkur Taluk. *E-Journal of Chemistry* 6(2), 523-530. DOI: 10.1155/2009/757424
- Saha SK Naznin S and Ahmed F (2006) A Household Based Safe water intervention program for a slum area in Bangladesh. *Asian journal of water, environment and pollution* **3(1)**: 21-26.
- Sinha DK, Shilpi S and Ritesh S (2004) Water Quality Index for Ram Ganga river at Moradabad. *Poll. Res.* **23(3)**: 527-531.
- Srivastava AK and Sinha DK (1994) Water Quality Index for river Sai at Rae Bareli for the pre-monsoon period and after the onset of monsoon. *Indian Journal of Environmental Protection* **14**: 340-345.