

## Theoretical Analysis of Gas Turbine Blades by Finite Element Method

**B. Deepanraj<sup>1</sup> and P. Lawrence<sup>2</sup>**

<sup>1</sup>Department of Mechanical Engineering, Adhiparasakthi Engineering College, Tamilnadu, India

<sup>2</sup>Department of Mechanical Engineering, Priyadarshini Engineering College, Tamilnadu, India

\*Corresponding Author: Email: babudeepan@gmail.com

---

**Abstract:** Gas turbine is an important functional part of many applications. Cooling of blades has been a major concern since they are in a high temperature environment. Various techniques have been proposed for the cooling of blades and one such technique is to have axial holes along the blade span. Finite element analysis is used to analyze thermal and structural performance due to the loading condition, with material properties of Titanium- Aluminum Alloy. Six different models with different number of holes (7, 8, 9, 10, 11, 12) were analyzed in this paper to find out the optimum number of holes for good performance. In Finite element analysis, first thermal analysis followed by structural analysis is carried out. Graphs plotted for temperature distribution for existing design (12 holes) and for 8 holes against time. 2D and 3D model of the blade with cooling passages are shown. Using ANSYS, bending stress, deflection, temperature distribution for number of holes are analyzed. Results have been discussed and we found that when the numbers of holes are increased in the blade, the temperature distribution falls down. For the blade configuration with 8 holes, the temperature near to the required value i.e., 800oC is obtained. Thus a turbine blade with 8 holes configuration is found to be the optimum solution.

**Keywords:** Gas turbine blade, stress, deflection, temperature distribution.

---

### 1. Introduction

Gas turbines are used extensively for aircraft propulsion, land-based power generation, and industrial applications. Thermal efficiency and power output of gas turbines increase with increasing turbine rotor inlet temperature. The current rotor inlet temperature level in advanced gas turbines is far above the melting point of the blade material. Therefore, along with high temperature material development, sophisticated cooling scheme must be developed for continuous safe operation of gas turbines with high performance. Gas turbine blades are cooled internally and externally; this paper focuses on turbine blade internal cooling. In this type cooler air is bled from the compressor stage and then passing through internal passages incorporated into blade designs for cooling purpose (Giovanni et al 2007).

### 2. Methods of Cooling

#### 2.1 Internal Cooling

Internal cooling of blades can be achieved by passing cooling air from the air compressor through internal cooling passages from hub towards the blade tips. The internal passages may be circular or elliptical and or distributed near the entire surface of blade. The shapes of such blades may deviate from the optimum aero dynamic blade profile. The cooling of the blade is achieved by conduction and convection, relatively hotter air after traversing the entire blade length in the cooling passages escapes to the main flow from the blade tips. Hollow blades can also be

manufactured with a core and internal cooling passage. Cooling air enters the leading edge region in the form of a jet and then turns towards the trailing edge (Gowreesh et al, 2009; Mohammad et al 2004).

## **2.2 External Cooling**

External cooling of the turbine blade is achieved in two ways. The cooling air enters the internal passages from the hub towards the tips. On its way upwards it is allowed to flow the blade surface through a number of small orifices inclined to the surface. The cooling air thus flowing out of these small holes forms a film over the blade surfaces. Besides cooling the blade surface it decreases the heat transfer from hot gases to the blade metal.

## **3. Finite Element Method**

The FEM has become a powerful tool for numerical solution of wide range of engineering problems. The advance in computer technology and high-speed electronic computers enables complex problems to model easily. This makes to test in computers before the first prototype is built. In these method of analyze, a complex continuum is defined into simple geometric shapes called FEM. The material properties and governing relationship are considered over these elements and expressed in term of unknown values at elemental corners. An assembly of this simple geometry shapes considering load and constraints, a set of equations are obtained ( Hildebrabd 1997).

Steps involved in FEM

- Select the continuum of the body.
- Selection of the displacement models.
- Derive the stiffness matrix and global load vector.
- Using the force-displacement relationship, the unknown nodal displacements are obtained.
- Using the strain-displacement and stress-strain relationship the unknown values are been calculated.
- Faster automatic calculations, which are repetitive in nature, simultaneous display of modifications & post processing results.
- Accurate prediction with adequate details for identifying critical areas of interest like highly stressed regions.

## **4. Finite Element Analysis of Gas Turbines Blade**

Finite element analysis can play a vital role by simplifying the analysis. In this work the turbine blade is analyzed for its thermal as well as structural performance due to the loading condition. Six different models having different number of holes where analyzed in this paper to find out the optimum number of holes for good performance.

**Table 1:** Dimensions of the blade

Parameter	Values
Blade Span	120 mm
Blade axial Chord Length	110 mm
Cooling passage diameter	2 mm

**Table 2:** Material properties of Titanium-Aluminium Alloy

Strength	Values
Modulus of Elasticity	118 GPa
Poisson's Ratio	0.3
Yield Stress	1050 Mpa
Coefficient of Thermal Expansion	$7.7e-6/^{\circ}c$
Density	4507 kg/m <sup>3</sup>
Thermal Conductivity	7 W/m/ $^{\circ}c$
Melting Point	1300 $^{\circ}c$

## 5. Modeling of Gas Turbine Blade

3D model of turbine blade with hub was done in two stages. First for creating the 3D model of the turbine blade, key points were created along the profile in the working plane. The points were joined by drawing B Spline curves to obtain a smooth contour. This contour was then converted into area and then volume was generated by extrusion. Then working plane was rotated by 90o to generate the hub part in the same way as the blade. These two volumes were then combined to make a single volume using union Boolean operation. Holes were then generated along the blade axially by using subtract Boolean operation. The finite element model was created by meshing the 3D model. Since the turbine blade analyses is unique in a way such that two different element types were involved during thermal and structural analyses respectively. The 3D Solid 87 element was used for meshing during thermal analyses. For structural analyses, Solid 92 element was used.

## 6. Thermal - Structural Analysis

The finite element analysis of the gas turbine blade was done sequentially i.e., thermal analysis was performed first, and then the structural analysis was carried out, by taking into account the results of the thermal analysis, the block diagram explains the above said things.

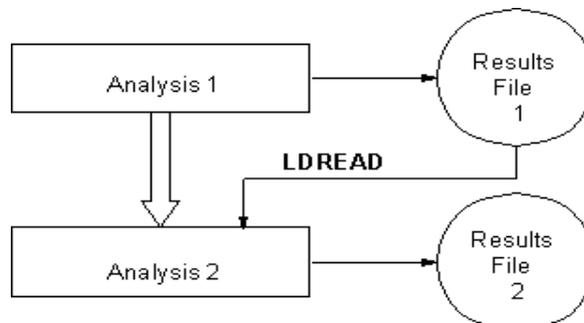


Fig. 1. Block diagram of thermal- structural analysis

## 6.1 Thermal Analysis

The transient thermal analysis was performed by applying the loading condition by using a time curve. For this hot gas, temperature was specified along the pressure side of the blade and the cool-ant temperature was applied on the cooling hole surface area. The hub being fixed to the rotor disc, it is constrained in all six degrees of freedom. Different thermal loads and convection boundary conditions were applied on pressure side of the blade model.

## 6.2 Structural Analysis

For structural analysis, the model was re-meshed using Solid 92 elements. The pressure load was applied on the pressure side of the blade and the analysis was performed. Since hub side of the blade was fixed with disc, hub side of the blade was fully arrested. Then structural loads were applied on pressure side of the blade model.

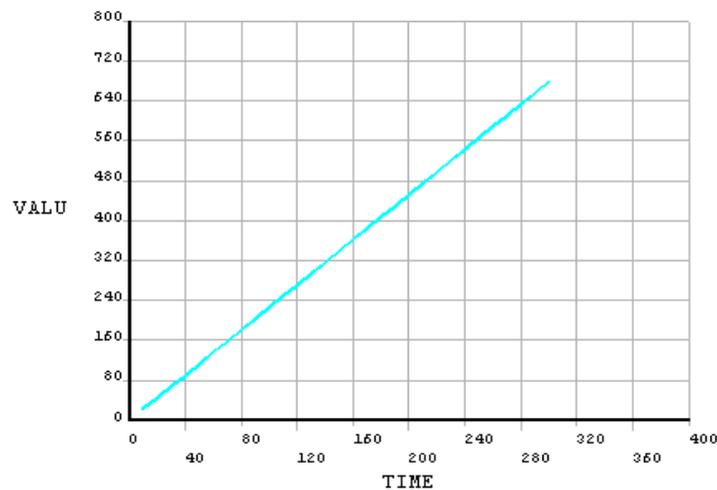


Fig. 2. Temperature Vs time for existing design (12 holes)

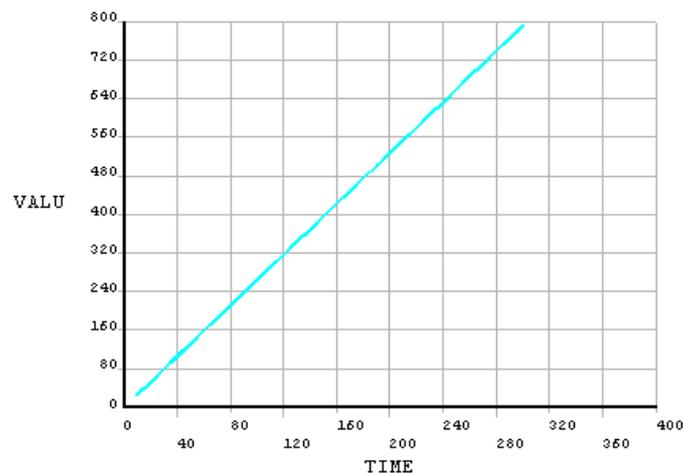


Fig. 3: Temperature Vs time for optimized design (8 holes)

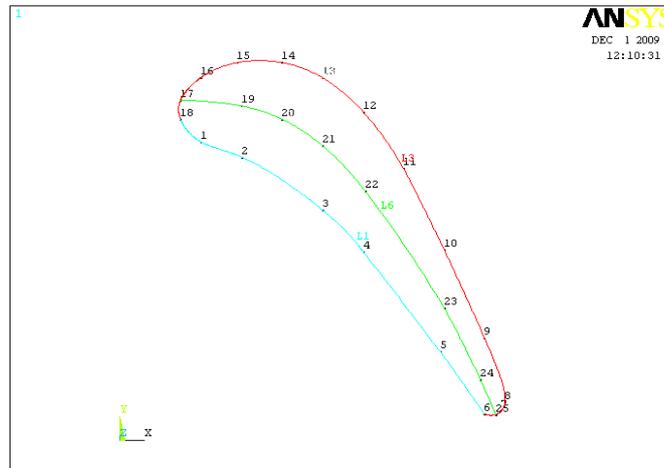


Fig. 4: Key points and splines of the blade

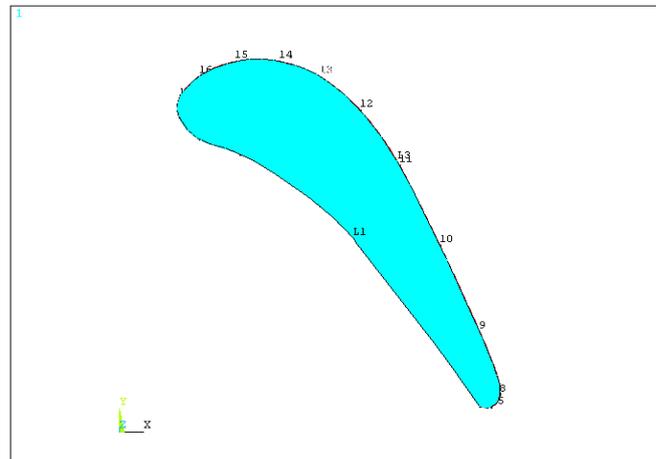


Fig. 5: Two dimensional model of the blade

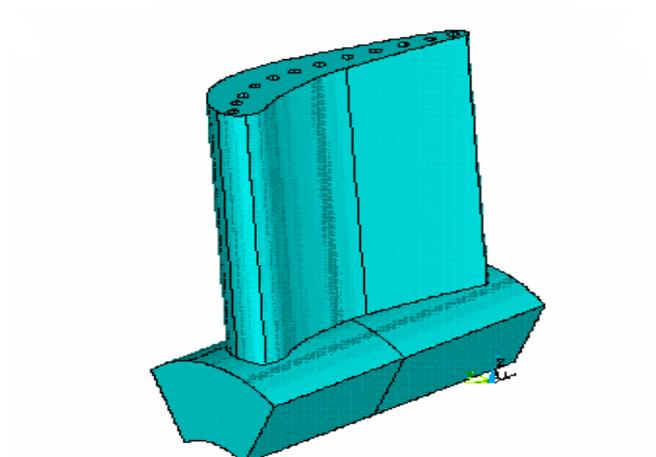


Fig. 6: 3D model of the blade with cooling passages

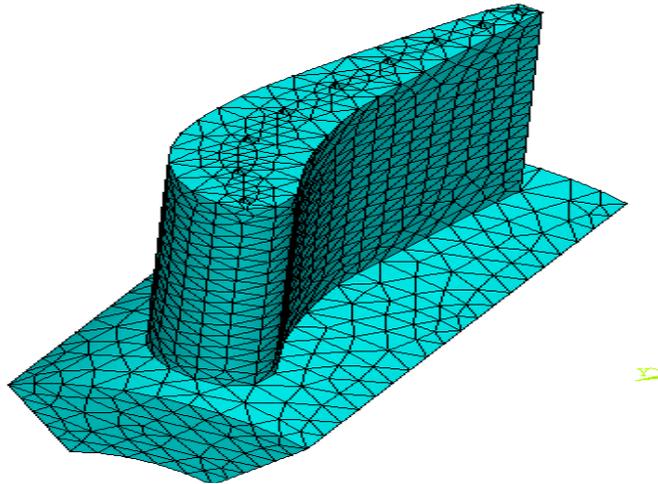


Fig. 7: Finite element model of the blade

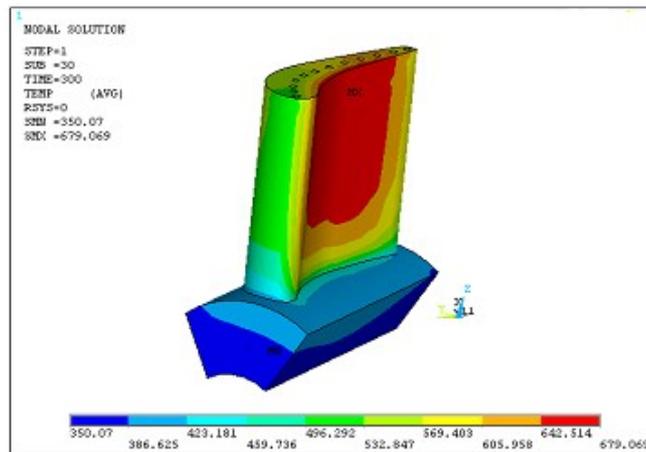


Fig. 8: Temperature distribution for existing design (12 holes)

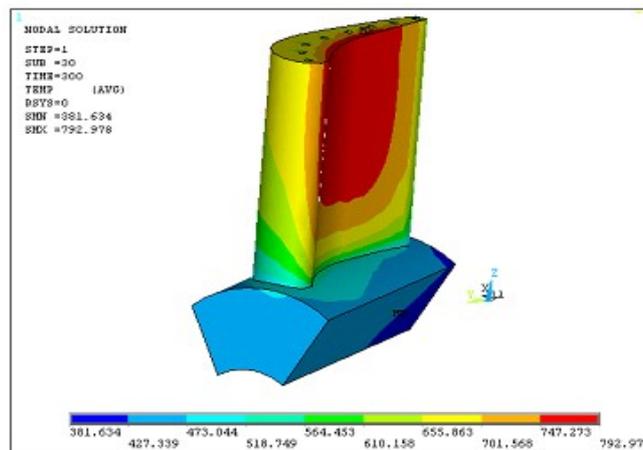


Fig. 9: Temperature distribution for optimized design (8 holes)

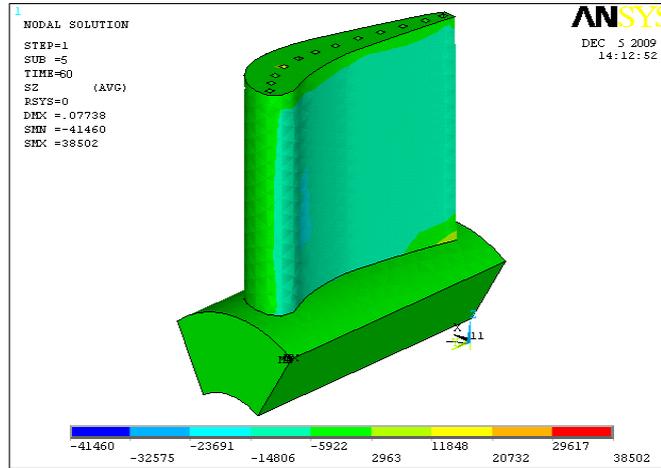


Fig. 10: Stress distribution for existing design (12 holes)

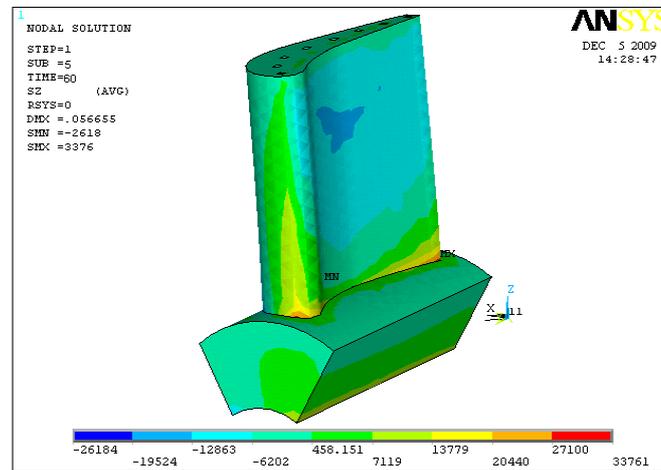


Fig. 11: Stress distribution for optimized design (8 holes)

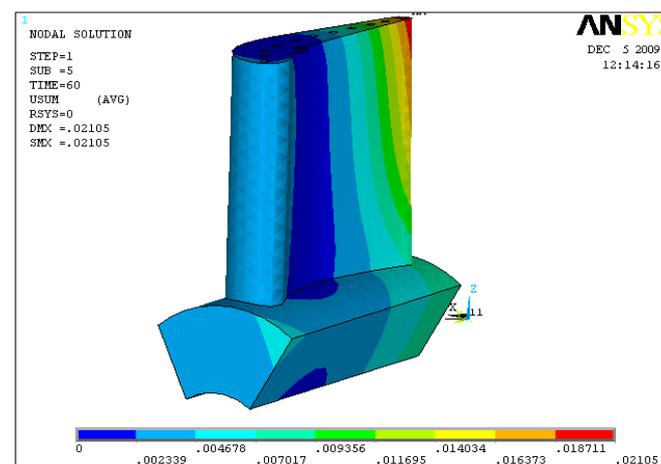


Fig. 12: Deflection plot for existing design (12 holes)

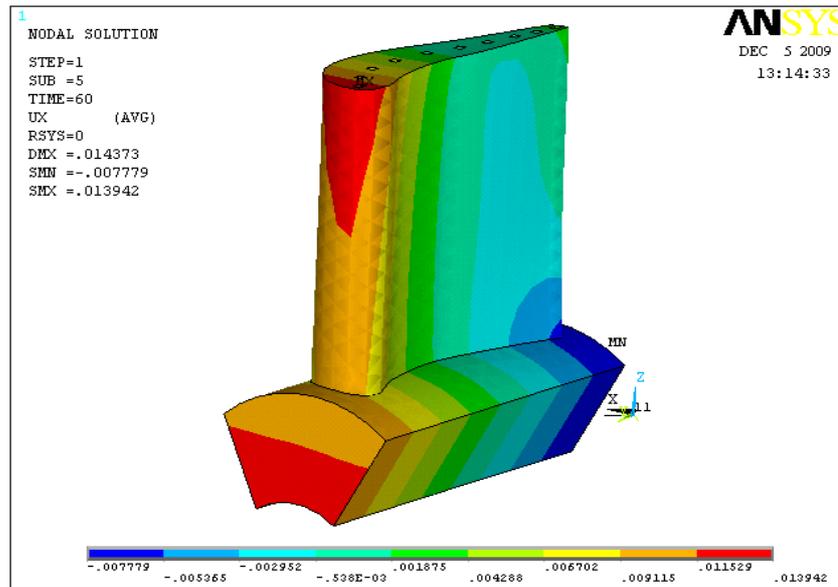


Fig. 13: Deflection plot for optimized design (8 holes)


## 7. Results and Discussions

The thermal-structural finite element analysis was performed for the turbine blades with different number of holes i.e., 12,11,10,9,8,7 number of holes by specifying thermal and structural loads with an objective of finding optimum number of holes for the best performance. First the existing blade design with 12 holes was analyzed by specifying 500o C as coolant temperature. Then by specifying 3000 C as coolant temperature, the thermal analysis and structural analysis was performed on all the six different blade models and thermal and stress distributions were obtained. The temperature distribution on existing design of turbine blade (with 12 holes) when analyzed with coolant temperature of 300o C is much less than that of same blade when analyzed with coolant temperature 500oC. When the coolant temperature of 300oC is intended to be used, it leads to over cooling and affects the performance since an average temperature of 800oC is the required allowance blade temperature for the maximum performance of the blade. The temperature distributions for different holes are shown in table 3.

**Table 3:** Temperature distribution for different holes.


No. of holes	Temperature distribution (oC)
12	679.6
11	707.1
10	755.2
9	784.8
8	792.8
7	827.6

Graphically the temperature as obtained when analysed with 300oC with coolant temperature against the number of holes. It can clearly see from the graph that when the numbers of holes are increased in the blade, the temperature distribution comes down. Only on the blade configuration with 8 holes, the temperature near to the required temperature i.e., 800oC is obtained.

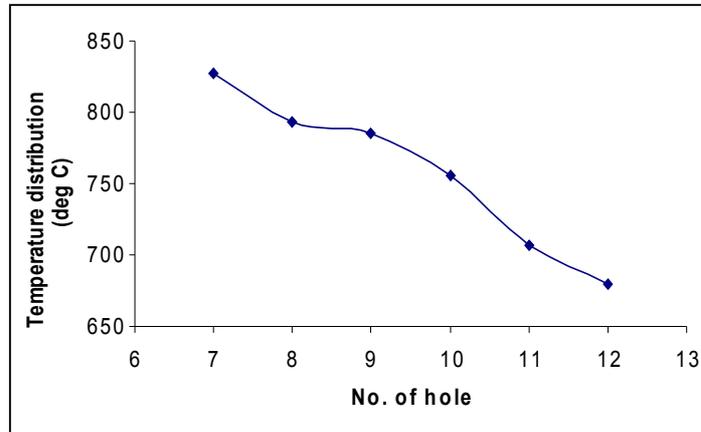

*Fig. 14: Temperature distribution Vs Number of holes*

For other configuration like blade with 7 holes or blade with 9 holes the temperature distribution is either on a higher side or below the required blade temperature of 800oC. Since the performance of the turbine will be less if the temperature distribution is either more than or much less than the required blade temperature of 800oC the blade with 8 holes is the most optimum number of holes that can be present. This graph very well demonstrates the fact that when the holes are more in number, the strength of the blade will be reduced.

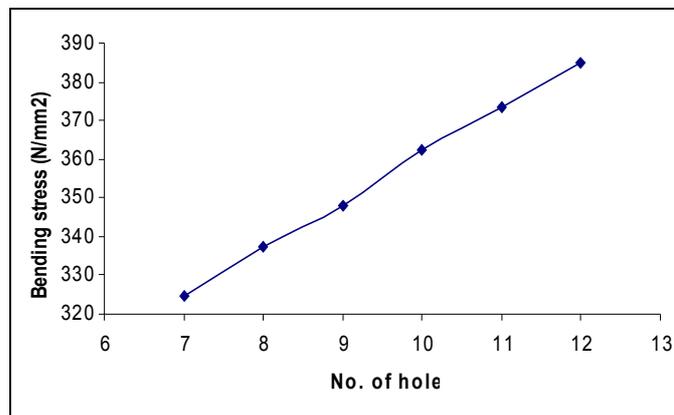

*Fig. 15: Bending stress Vs Number of holes*

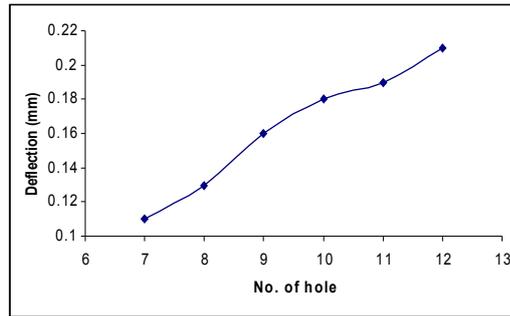


Fig. 16: Deflection Vs Number of holes

Even though the bending stress for blade with 7 holes is less than that of the blade with 8 holes, the temperature distribution is better for blade with 8 holes. This combination of better temperature distribution and lower stress levels in the turbine with 8 numbers of holes makes it as the best possible configuration.

## 8. Conclusion

In this paper, using finite element analysis as a tool, the structural and thermal analyses were carried out sequentially. The blade with different no. of holes (i.e.,) 7, 8, 9, 10, 11 and 12 were used for analysis. From the results obtained, it was found that the blade with 8 holes has got the best temperature distribution when compared other configurations of the blade when the coolant temperature was 3000C. Also, the temperature distribution for the blade with eight holes, matches closely with prescribed temperature of 8000C for the better performance of the turbine. The bending stress, obtained from finite element analysis shows lower stress level for the blade with 8 holes. This shows the effectiveness of the finite element analysis. These results indicate that the blade with eight holes will have optimum performance for the prescribed loading conditions.

## REFERENCES

- [1] Cleeton JPE, Kavanagh RM, Parks GT (2009) Blade cooling optimisation in humid-air and steam-injected gas turbines. *Applied Thermal Engineering*, 29, pp. 3274-3283
- [2] Cun-liang Liu, Hui-ren Zhu, Jiang-tao Bai, Du-chun Xu (2010) Film cooling performance of converging slot-hole rows on a gas turbine blade. *International Journal of Heat and Mass Transfer*, 53, pp.5232-5241
- [3] Facchini B, Stecco SS (1999) Cooled expansion in gas turbines: a comparison of analysis methods. *Energy Conversion and Management*, 40, pp.1207-1224
- [4] Giovanni Cerri, Ambra Giovannelli, Lorenzo Battisti, Roberto Fedrizzi (2007) Advances in effusive cooling techniques of gas turbines. *Applied Thermal Engineering*, 27, pp.692-698
- [5] Gowreesh S, Sreenivasalu Reddy N, and Yogananda Murthy NV (2009) Convective Heat Transfer Analysis of a Aero Gas Turbine Blade Using Ansys. *International Journal of Mechanics and Solids*, 4, pp.39-46
- [6] Hildebrabd FB (1997) *Introduction to Numerical Analysis*, McGraw-Hill, New York

- [7] Krishnamoorthy C (1994) *Finite Element Analysis Theory and Programming*. Tata McGraw-Hill, New Delhi
- [8] Mahfoud Kadja, George Bergeles (1997) Computational study of turbine blade cooling by slot-injection of a gas. *Applied Thermal Engineering*, 17, pp.1141-1149
- [9] Martin HC, Carey GF (2006) *Introduction to the Finite Element Analysis*, McGraw Hill Publishing Co Ltd, New Delhi
- [10] Mohammad H, Albeirutty, Abdullah S, Alghamdi, Yousef S, Najjar (2004) Heat transfer analysis for a multistage gas turbine using different blade-cooling schemes. *Applied Thermal Engineering*, 24, pp.563-577
- [11] Moussavi Torshizi SE, Yadavar Nikravesht SM, Jahangiri A (2009) Failure analysis of gas turbine generator cooling fan blades. *Engineering Failure Analysis*, 16, pp.1686-1695
- [12] Moyroud F, Fransson T, Jacquet-Richardet G (2002) A comparison of two finite element reduction techniques for mistuned bladed-disks. *Journal of Engineering for Gas Turbines and Power*, 124, pp.942-953
- [13] Zhang JJ, Esat II, Shi YH (1999) Load Analysis with Varying Mesh Stiffness. *Computers and Structures*, 70, pp.273-280